



EMERSON[™]
Industrial Automation

Commander SK

AC Drives – Simple to Use,
Compact to Fit, Power to Perform

0.25 to 132 kW (0.33 to 200 HP)
100V / 200V / 400V / 575V / 690V



**CONTROL
TECHNIQUES**

www.controltechniques.com

COMMANDER SK – SIMPLE & COMPACT YET POWERFUL

- Easy to set up – all the parameters you need for typical applications are shown on the front facia – it could not be easier
- Easy installation – choose between simple panel mounting and DIN-rail mounting (up to 1.5 kW/ 2hp)
- Simple connections – easy access terminals with clear marking
- Simple start up – simple push button set up – no need for complex programming
- Built in EMC filter
- Display Keypad included as standard
- Software and Documentation CD included as standard
- Communications Port RS485 – Modbus RTU as standard
- Available up to 132 kW / 200 hp
- Unbeatable Performance – Try it! Compare it!



SIMPLE TO USE...


Commander SK is an easy drive – easy to connect, easy to configure and easy to install.

Easy to connect - All connectors are generously sized and clearly labelled.

Easy to configure - The configuration settings you need for most applications are detailed on the front facia of the drive.

Easy to install - Flexibility allows you to install the drive in the best way for your application.

- All drive sizes can be mounted on a flat surface
- DIN rail fixing integrated on small sizes
- Provision for “through hole mounting” is standard above 4kW. This allows the heat from the drive to be dissipated externally meaning the size of the cubicle can be greatly reduced



COMPACT TO FIT...

Commander SK is a compact drive - A compact footprint with space saving features.

Commander SK gives you back valuable space with its compact footprint and extra features that can eliminate the requirement for additional components such as EMC filters.

In simple applications the onboard PLC feature saves you money by removing the need for an external PLC and power supplies. Integrated fieldbus options minimise the need for external I/O to interface with the drive.



POWER TO PERFORM...

Commander SK – Reliable and productive with exceptional motor performance as you would expect from a Control Techniques drive.

Control Techniques have a fine heritage in manufacturing high performance drives; Commander SK is designed with the same principles to give you an easy to apply performance drive for your standard AC motors. Technology is used to achieve this, on power-up the drive automatically measures the motor characteristics to ensure you get the best motor performance straight out of the box, every time - how could we make it easier?



COMMANDER SK ORDER CODES

100 / 120 VAC +/- 10% 1 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SKB1100075				4	0.75	1
SKB1100110				5.2	1.1	1.5

200 / 240 VAC +/- 10% 1 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SKA1200025				1.7	0.25	0.33
SKA1200037				2.2	0.37	0.5
SKA1200055				3	0.55	0.75
SKA1200075				4	0.75	1
SKBD200110				5.2	1.1	1.5
SKBD200150				7	1.5	2
SKCD200220				9.6	2.2	3

200 / 240 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SKBD200110				5.2	1.1	1.5
SKBD200150				7	1.5	2
SKCD200220				9.6	2.2	3
SK2202	22	5.5	7.5	17	4	5.0
SK2203	28	7.5	10	25	5.5	7.5
SK3201	42	11	15	31	7.5	10
SK3202	54	15	20	42	11	15
SK4201	68	18.5	25	56	15	20
SK4202	80	22	30	68	18.5	25
SK4203	104	30	40	80	22	30
SK5201	130	37	50	105	30	40
SK5202	154	45	60	130	37	50

575 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SK3501	5.4	3	3	4.1	2.2	2
SK3502	6.1	4	5	5.4	3	3
SK3503	8.4	5.5	7.5	6.1	4	5
SK3504	11	7.5	10	9.5	5.5	7.5
SK3505	16	11	15	12	7.5	10
SK3506	22	15	20	18	11	15
SK3507	27	18.5	25	22	15	20
SK4603	36	22	30	27	18.5	25
SK4604	43	30	40	36	22	30
SK4605	52	37	50	43	30	40
SK4606	62	45	60	52	37	50
SK5601	84	55	75	63	45	60
SK5602	99	75	100	85	55	75
SK6601	125	90	125	100	75	100
SK6602	144	110	150	125	90	125


380 / 480 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SKB3400037				1.3	0.37	0.5
SKB3400055				1.7	0.55	0.75
SKB3400075				2.1	0.75	1
SKB3400110				2.8	1.1	1.5
SKB3400150				3.8	1.5	2
SKC3400220				5.1	2.2	3
SKC3400300				7.2	3	3
SKC3400400				9	4	5
SK2401	15.3	7.5	10	13	5.5	10
SK2402	21	11	15	16.5	7.5	10
SK2403	29	15	20	25	11	20
SK2404				29	15	20
SK3401	35	18.5	25	32	15	25
SK3402	43	22	30	40	18.5	30
SK3403	56	30	40	46	22	30
SK4401	68	37	50	60	30	50
SK4402	83	45	60	74	37	60
SK4403	104	55	75	96	45	75
SK5401	138	75	100	124	55	100
SK5402	168	90	125	156	75	125
SK6401	205	110	150	180	90	150
SK6402	236	132	200	210	110	150

690 VAC +/- 10% 3 phase	Normal Duty			Heavy Duty		
	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)	Max Continual Current (A)	Typical Output (kW)	Motor Power (HP)
Order Code						
SK4601	22	18.5	25	19	15	20
SK4602	27	22	30	22	18.5	25
SK4603	36	30	40	27	22	30
SK4604	43	37	50	36	30	40
SK4605	52	45	60	43	37	50
SK4606	62	55	75	52	45	60
SK5601	84	75	100	63	55	75
SK5602	99	90	125	85	75	100
SK6601	125	110	150	100	90	125
SK6602	144	132	175	125	110	150


Normal Duty For applications which use self-ventilated induction motors and require a low overload capability (e.g. fans, pumps)

Heavy Duty 150% overload current for 60 s. For constant torque applications which require a high overload capability (e.g. cranes, hoists).

COMMANDER SK DIMENSIONS

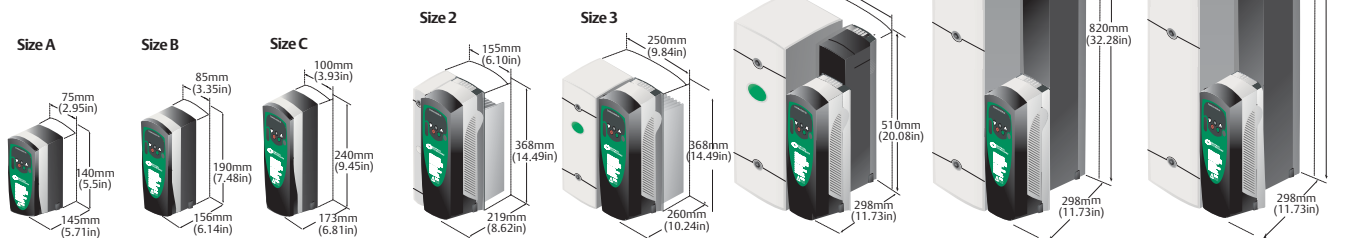

QUICK TO CONNECT...

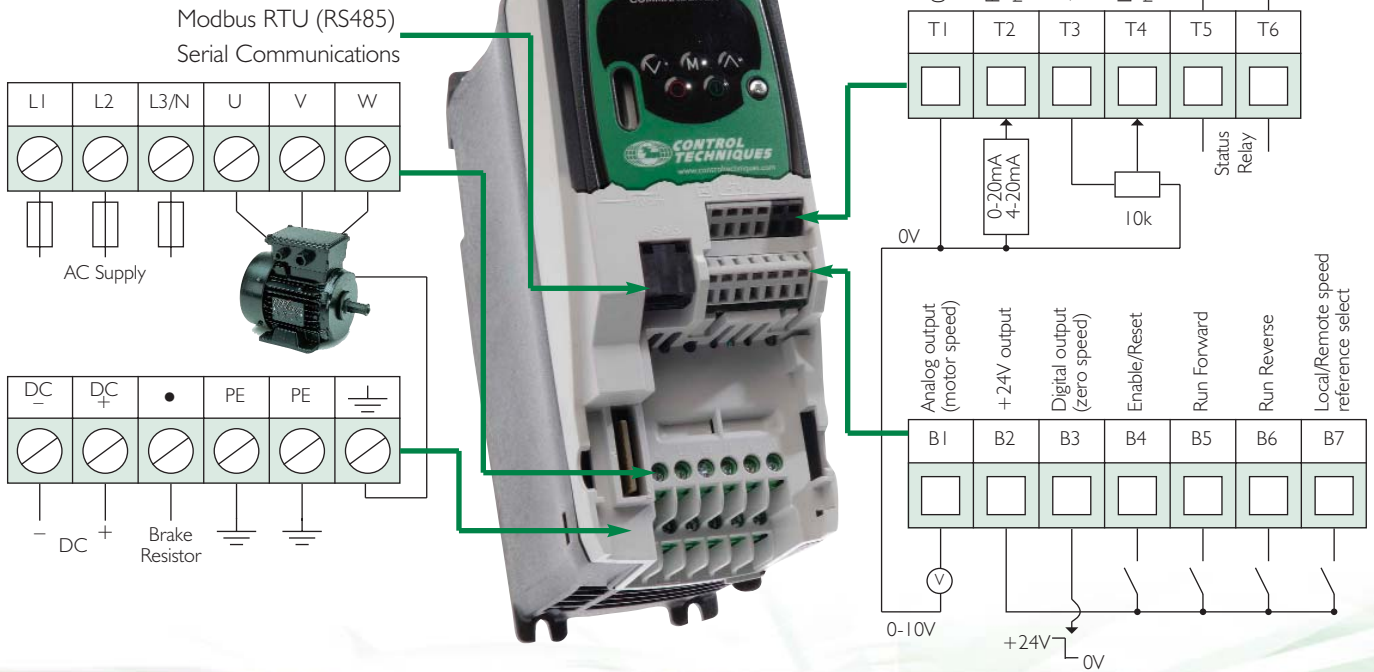

SIMPLICITY OF SET UP TO DRIVE YOUR MACHINE AT OPTIMUM EFFICIENCY

- Automatic no-spin autotune for rapid performance optimisation
- 8 preset speeds available
- Keypad access to all parameters – basic and advanced menus
- Open loop vector control. Speed or Torque control
- Speed reference input: 0-10V, 0-20mA, 4-20mA (-10V to +10V SM-I/O Lite option)
- Switching frequency from 3kHz up to 18kHz – quiet motor operation
- Output frequency from 0 to 1500 Hz
- Linear and S type acceleration and deceleration ramps
- Modbus RTU RS485 via RJ45 connector as standard
- DC injection braking as standard
- Dynamic braking transistor as standard
- Energy savings with dynamic motor flux V/Hz
- Fan and pump optimisation with quadratic motor flux V/Hz

Environment

- IP20
- UL Type I kit and cover kit options up to 4kW
- Ambient temperature -10°C to 40°C
- Electromagnetic Immunity complies with EN61800-3 and EN61000-6-3 and 4
- Humidity 95% maximum (non-condensing)
- Electromagnetic Emissions complies with EN61800-3 (second environment) as standard. Complies with EN61000-6-3 (residential) and EN61000-6-4 (industrial) generic standards with optional footprint EMC filter



COMMANDER SK CAN DO EVEN MORE...

Commander SK is delivered to you ready to run, however, a comprehensive range of accessories allow you to expand the features to achieve even more with your drive.



1 Operator Interface Options

Interface with your Commander SK with a comprehensive range of optional remote keypads and operator interfaces; these can be used to commission and control the drive.

- SK Keypad – A simple LED keypad with a high IP65 rating
- SM-Keypad Plus – A plain text, multi-language LCD keypad
- HMI Panels – A range of fully configurable LCD touch screen displays



2 Installation Options

Flexible installation accessories help you to optimise the drive for your application.

- An internal braking transistor is standard on Commander SK, by fitting an optional braking resistor you can decelerate even heavier loads more rapidly
- Additional EMC Filters supplement the drives internal filter to allow you to meet even more stringent standards
- The robust SK Cable Bracket makes it easier to support heavy cables and conduit glands to the drives
- UL Type I kit and cover kit options up to 4kW

3 Communication, Programming and Control Options

Add intelligence and connectivity to your drive with a range of integration accessories. As an example Ethernet and internet connectivity allows you to connect your PC to a drive located anywhere in the world, Commander SK is as simple or sophisticated as you need it to be.

- **Communications** – All major fieldbus communications are supported through click-in option modules
- **I/O Modules** – A range of click-in I/O options are available that allow you to further extend the functionality of the drive
- **SmartStick** – Inserting the SmartStick into the front fascia of the drive enables parameters to be copied from one drive to another. This is especially useful for replicating a configuration across multiple drives
- **LogicStick** – Inserting the LogicStick into the front fascia of the drive adds the required memory storage for the use of the onboard PLC features. This is an advantage in applications where traditionally a small external PLC would normally be used

- **Serial cable** – This is a safe isolated cable to link your PC with the drive
- **PC software tools** – Included with the drive, these provide the means to gain easy access to the advanced features

Note: Click in option modules may only be fitted on drives above 0.75kW.



COMMANDER SK – THE MOST POWERFUL EASY AC DRIVE IN THE WORLD...

Dynamic Performance that Exceeds Expectations

Though simple to operate, Commander SK has the performance characteristics to allow it to solve applications normally requiring more complex and expensive drives. Commander SK is robust and ideal for industrial applications demanding high cycle rates and tight speed control, such as indexers and fuel pumps. Its superior shaft performance makes it incredibly responsive to either demand or load changes. The ability to hold torque down to 1 Hz makes it ideal for material handling applications. Selectable switching frequencies allow for quiet motor operation.



Lower Cost Solution from Premium Technology

Commander SK includes premium functionalities as standard: logic functions, comparators, motorised potentiometer, PID regulator, dynamic braking transistor with optional external braking resistor and DC injection braking as standard. Optional functions include SM-I/O Lite that can control an external encoder and even allow real-time clock functions with SM-I/O Timer.

Dynamic performance, PLC functionality, Premium functionalities and Plug-in options ensure that in more complex applications Commander SK can deliver more than the average general purpose drive – giving you lower cost solutions and better productivity in your motor control applications.



Replace PLCs

The Commander SK from Control Techniques establishes its dominant status in simple general purpose drives providing a level of performance and flexibility not found in any other low-cost, open loop AC drive. It is the first economical drive that a user can add PLC functionality into, to save both space and cost on systems. The LogicStick and the free of charge SyPTLite programming software can be used to replace a nano or micro PLC, or to replace relays and timers.

Powerful and Reliable

Commander SK has been developed, tested and proven in the harshest operating conditions by Control Techniques dedicated electrical, mechanical and software engineering groups. The result: a strong drive that gets your machine running quickly and consistently with the highest productivity.



**TRANSFORMING ENERGY INTO
MOVEMENT IS ONE THING.
CONTROLLING THE MOVEMENT
WITH COMMANDER SK
IS ANOTHER.**

Drive & Application Centres

AUSTRALIA

Melbourne Application Centre
A.C.N. 003 815 281
Tel: 613 973 81777
Fax: 613 9729 3200
After Hours: 61 2 9963 5271

Sydney Drive Centre
A.C.N. 003 815 281
Tel: 61 2 9838 7222
Fax: 61 2 9838 7764
After Hours: 61 2 9963 5271

AUSTRIA

Linz Drive Centre
Tel: 43 7229 789480
Fax: 43 7229 7894810
After Hours: 43 7215 3502

BELGIUM

Brussels Drive Centre
Tel: 32 1 574 0700
Fax: 32 1 574 0799

BRAZIL

Emerson do Brazil Ltda
Tel: 55 11 3618 6569
Fax: 1 905 201 4694
After Hours: 1 800 893 2321

CANADA

Toronto Drive Centre
Tel: 1 905 201 4699
Fax: 1 905 201 4694
After Hours: 1 800 893 2321

Calgary Drive Centre
Tel: 1 403 253 8738
Fax: 1 403 255 4323

CHINA

Shanghai Drive Centre
Tel: 86 21 5426 0668
Fax: 86 21 5426 0669

Beijing Application Centre
Tel: 86 10 856 31 122 ext 820
Fax: 86 10 856 35029

ARGENTINA

Euro Techniques SA
Tel: 54 11 4331 7820
Email: eurotech@eurotechsa.com.ar

BAHRAIN

Iftikhar Electrical Est.
Tel: 973 271 1116
Email: ieeepower@batelco.com.bh

BRAZIL

ACIEL Comercio e Servicos LTDA
Tel: 55 11 5565 5798
Email: aciel@acielf.com.br
Positronic Sistemas Industriais Ltda.
Tel: 55 11 3832 2738
Email: info@positronic.com.br

BULGARIA

BLS - Automation Ltd
Tel: 359 32 968 007
Email: idt@idt.d

CENTRAL AMERICA

Mercado Industrial Inc.
Tel: 1 305 854 9515
Email: rsybe@mercadoindustrialinc.com

CHILE

Ingeniería Y Desarrollo
Tecnológico S.A
Tel: 56 2741 9624
Email: idt@idt.d

CZECH REPUBLIC

Brno Drive Centre
Tel: 420 541 192111
Fax: 420 541 192115
After Hours: 420 541 192 119

DENMARK

Copenhagen Drive Centre
Tel: 45 4369 6100
Fax: 45 4369 6101
After Hours: 45 4369 6100

FRANCE

Angouleme Drive Centre
Tel: 33 5 4564 5454
Fax: 33 5 4564 5400

GERMANY

Bonn Drive Centre
Tel: 49 2242 8770
Fax: 49 2242 877277
After Hours: 49 1714 964777

IRELAND

Chemnitz Drive Centre
Tel: 49 3722 52030
Fax: 49 3722 520330
After Hours: 49 1714 964777

ITALY

Darmstadt Drive Centre
Tel: 49 6251 17700
Fax: 49 6251 177098
After Hours: 49 1714 964777

GREECE

Athens Application Centre
Tel: 0030 210 57 86086/088
Fax: 0030 210 57 86087

HOLLAND

Rotterdam Drive Centre
Tel: 31 184 420555
Fax: 31 184 420721
After Hours: 31 184 420555

HONG KONG

Hong Kong Application Centre
Tel: 852 2979 5271
Fax: 852 2979 5220
After Hours: 852 2979 5271

COLOMBIA

Sistrion LTDA
Tel: 57 1 410 04 24
Email: jonesdug@colomsat.net.co

CROATIA

Koncar - MES d.d.
Tel: 385 1 366 7273
Email: nabava@koncar-mes.hr

CYPRUS

Acme Industrial Electronic
Services Ltd
Tel: 3572 5 332181
Email: acme@cytanet.com.cy

EGYPT

Samiram
Tel: 202 7603877/202 7605950
Email: corporate@samiram.com

FINLAND

SKS Control
Tel: 358 985 2661
Email: control@sksf

HUNGARY

Control-VH Kft
Tel: 361 431 1160
Email: info@controlvh.hu

ICELAND

Samey ehf
Tel: 354 510 5200
Email: samey@samey.is

INDIA

Mumbai Application Centre
Tel: 91 20 612 7956, 612 8415
Fax: 91 20 611 3312

Kolkata Application Centre
Tel: 91 33 2357 5302/2357 5306
Fax: 91 33 2357 3435
After Hours: 91 98 3004 8562

Chennai Drive Centre
Tel: 91 44 2496 1123/
2496 1130/2496 1083
Fax: 91 44 2496 1602
After Hours: 91 44 2496 1083

New Delhi Application Centre
Tel: 91 11 2 576 4782/
91 11 2 581 3166
Fax: 91 11 51 539216

IRELAND

Dublin Drive Centre
Tel: 353 45 448200
Fax: 353 45 433622

ITALY

Milan Drive Centre
Tel: 39 02575 751
Fax: 39 02575 12858
After Hours: 39 02575 751

Reggio Emilia Application Centre
Tel: 39 02575 751
Fax: 39 02575 12858
After Hours: 39 02575 751

VICENZA DRIVE CENTRE

Tel: 39 0444 933400
Fax: 39 0444 933401
After Hours: 39 02 575 751

KOREA

Seoul Application Centre
Tel: 82 31 703 7169
Fax: 82 31 703 7168
After Hours: 82 31 703 7185

Distributors

INDONESIA

Pt Apikon Indonesia
Tel: 65 6468 8979
Email: ooivc@controltechniques.com.my

PT YUA ESA

Sempurna Sejahtera
Tel: 65 6468 8979
Email: ooivc@controltechniques.com.my

ISRAEL

Dor Drives Systems Ltd
Tel: 972 3900 7595
Email: info@dorl.co.il

KENYA

Kassam & Bros Co. Ltd
Tel: 254 2 556 418
Email: kassambros@bidi.com

KUWAIT

Saleh Jamal & Company WLL
Tel: 965 483 2358
Email: sjceng@almulagroup.com

LATVIA

EMT
Tel: 371 760 2026
Email: janis@emt.lv

LEBANON

Black Box Automation & Control
Tel: 961 71 443773
Email: info@blackboxcontrol.com

MALAYSIA

Kuala Lumpur Drive Centre
Tel: 603 5634 9776
Fax: 603 5633 9592
After Hours: 60 12 333 8355

REPUBLIC OF SOUTH AFRICA

Johannesburg Drive Centre
Tel: 27 11 462 1740
Fax: 27 11 462 1941
After Hours: 27 11 462 1740

Cape Town Application Centre
Tel: 27 21 556 0245
Fax: 27 21 556 2574
After Hours: 27 11 462 1740

RUSSIA

Moscow Application Centre
Tel: 7 095 232 9472
Fax: 7 095 956 4862

SINGAPORE

Singapore Drive Centre
Tel: 65 6468 8979
Fax: 65 6468 6982
After Hours: 65 9752 5828/
9636 0323

SPAIN

Barcelona Drive Centre
Tel: 34 93 680 1661
Fax: 34 93 680 0903
/34 93 680 2823
After Hours: 34 610 554540

BILBAO APPLICATION CENTRE

Tel: 34 94 620 3646
Fax: 34 94 681 1406
After Hours: 34 61 - 055 4547

VALENCIA DRIVE CENTRE

Tel: 34 96 154 2900
Fax: 34 96 153 2906
After Hours: 34 66 642 8514

SWEDEN

Stockholm Application Centre
Tel: 468 554 241 00
Fax: 468 554 241 10
After Hours: 467 044 183 29

SWITZERLAND

Lausanne Application Centre
Tel: 41 21 637 7070
Fax: 41 21 637 7071
After Hours: 41 79 357 8683

ZURICH DRIVE CENTRE

Tel: 41 56 201 4242
Fax: 41 56 201 4243
After Hours: 41 79 357 8683

TAIWAN

Taipei Application Centre
Tel: 886 22325 9555
Fax: 886 22705 9131
After Hours: 886 92186 6502

THAILAND

Bangkok Drive Centre
Tel: 66 2580 7644
Fax: 66 2591 4559
A/Hours Sales: 66 1443 4095
A/Hours Service: 66 1443 4098

TURKEY

Istanbul Drive Centre
Tel: 90 216 4182420
Fax: 90 216 4182423
After Hours: 90 216 418 2420

UAE

Dubai Application Centre
Tel: 971 4 883 8650
Fax: 971 4 883 8651

UNITED KINGDOM

Telford Drive Centre
Tel: 44 1952 213700
Fax: 44 1952 213701
After Hours: 44 1952 213700

USA

California Drive Centre
Tel: 1 562 943 0300
Fax: 1 562 902 9360

Charlotte Application Centre
Tel: 1 704 393 3366
Fax: 1 704 393 9900
After Hours: 1 800 893 2321

Chicago Application Centre
Tel: 1 630 752 9090
Fax: 1 630 752 9555
After Hours: 1 800 893 2321

Cleveland Drive Centre
Tel: 1 440 717 0123
Fax: 1 440 717 0133
After Hours: 1 800 893 2321

Florida Drive Centre
Tel: 1 239 693 7200
Fax: 1 239 693 2431

LATIN AMERICA SALES OFFICE

Tel: 1 305 818 8897
Fax: 1 305 818 8888
Email: alfredo.rivas@emersonct.com

Minneapolis US Headquarters
Tel: 1 952 995 8000
Fax: 1 952 995 8020/8099
After Hours: 1 800 893 2321

Oregon Drive Centre
Tel: 1 503 266 2094
Fax: 1 503 266 1152

PROVIDENCE DRIVE CENTRE

Tel: 1 401 541 7277
Fax: 1 401 541 7266
After Hours: 1 800 893 2321

UTAH DRIVE CENTRE

Tel: 1 801 566 5521
Fax: 1 801 566 5673